MARION COUNTY SURVEYOR'S OFFICE

DEBRA S. JENKINS MARION COUNTY SURVEYOR

SEC. 36 TWN. 15_N RNG. 3_E

SECTION CORNER RECORD

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR

Hanna Ave 4000 S

1100



Party Chief: Wilcoxen


Crew: Finney


Type of Marker: Harrison

Method of Establishment: County: 6-4-1993

IN S.P.C. E Zone, NAD 83

Name: 15033606 N: 494 403.020 2(m) E: 59 464.100 4(m)

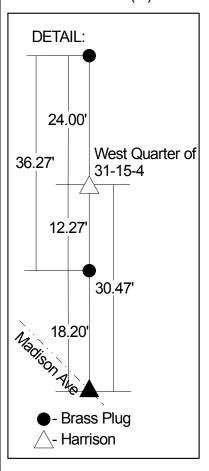

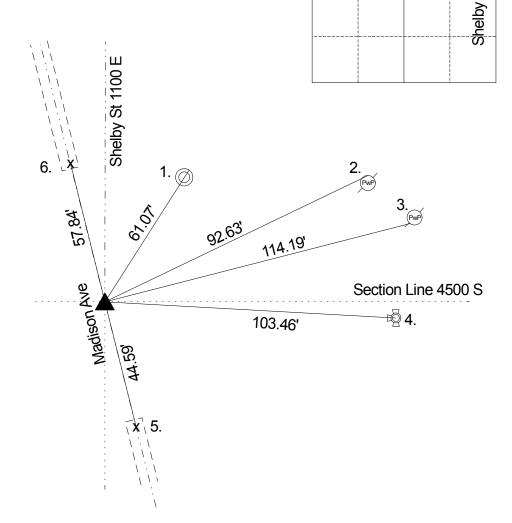

Original post set 1820 by Laughlin with witnesses: 8" white oak S 44 W 15 links, 18" elm N37 E 30 links per Marion County Atlas p.6. Voorhis 3-21-1861 called no stone but witnesses: 11" locust N 55.5 E 39 links per Perry Township Legal Survey Book pg. 38. MCSO 10-2-1964 called brass bolt. Miller 10-21-75 called brass bolt. Greene 12-5-86 called same. Wilcoxen 6-4-93 called PK nail in lead pipe. Wilcoxen 9-7-95 called same. Excavated 6-13-1998 and Harrison set, corner retied. Retied 9-9-2003 by Wilcoxen. Retied 8-11-09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	61.07'	Cut 'x' NE rim manhole
2.	92.63'	Road nail N PwP #1-668 B 8" up
3.	114.19'	Road nail SE PwP #833-1021 36" up
4.	103.46'	Top nut of fire hydrant
5.	44.59'	Cut 'x' in median
6.	57.84'	Cut 'x' in median